

Work Order ID 96251

January-25-13 9:26:24 AM

96251

Page 1

Item ID: D4086-200 Accept ***N900040100*** Setup Start ***NS1***
 Revision ID: Stop ***NS2***
 Item Name: Placard, Max Load
 Start Date: 1/16/13 Start Qty: 10.00 ***10*** Cust Item ID:
 Required Date: 2/08/13 Req'd Qty: 10.00 ***10*** Customer:
 Reference:

Approvals: Process Plan: MLS Date: 13-01-25 Tooling: _____ Date: _____ Run Start ***NR1***
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D4086	B								
100		0.00							
100									
Purchasing	Memo	0.00							
Purchasing	Issue P/O: <u>15950</u> Manufacture as per Dwg D4086 Possible Supplier: Studio Lettrage Material release note required								<u>PL 13-01-25</u>
110	Receive & Inspect for Damage & Mat'l Certs	0.00							
110									
Packaging	Memo	0.00							<u>10x</u>
Packaging									<u>SP</u> <u>13-01-30</u>
120	QC6- Inspect dimensions to drawing	0.00							
120									
QC	Memo	0.00							<u>10</u>
Quality Control									<u>SMD</u> <u>13.1.30</u>

NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update <input type="checkbox"/>	AGAINST DEPARTMENT/PROCESS <table style="width: 100%;"> <tr> <td>Skid-tube <input type="checkbox"/></td> <td>Crosstube <input type="checkbox"/></td> <td>Water Jet <input type="checkbox"/></td> <td>Engineering <input type="checkbox"/></td> </tr> <tr> <td>Machining <input type="checkbox"/></td> <td>Small Fab <input type="checkbox"/></td> <td>Prod. Eng. Coord. <input type="checkbox"/></td> <td>Quality <input type="checkbox"/></td> </tr> <tr> <td>Thermoforming <input type="checkbox"/></td> <td>Finishing <input type="checkbox"/></td> <td>Rec/Store/Packaging <input type="checkbox"/></td> <td>Other <input type="checkbox"/></td> </tr> <tr> <td>Large Fab <input type="checkbox"/></td> <td>Composite <input type="checkbox"/></td> <td>Supplier <input type="checkbox"/></td> <td></td> </tr> </table>	Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>	Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>	Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>	Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>	
Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>															
Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>															
Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>															
Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>																

Root Cause	Date	Step	Qty	Description of work order update or Non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector
Doc/Data									
Equip/Tooling									
Operator									
Material									
Setup									
Other									
Process									
Supplier									
Training									
Unapproved									

FAULT CATEGORY

Landing Gear	General	Other
<input type="checkbox"/> Bending	<input type="checkbox"/> Bend	<input type="checkbox"/> Grain
<input type="checkbox"/> Centre Not Concentric to O/S	<input type="checkbox"/> BOM/Route	<input type="checkbox"/> Hardware
<input type="checkbox"/> Cracks	<input type="checkbox"/> Broken/Damaged	<input type="checkbox"/> Inspection Incomplete
<input type="checkbox"/> Crushed/Crimped	<input type="checkbox"/> Burrs	<input type="checkbox"/> Instructions Incomplete/Unclear
<input type="checkbox"/> Cuffs	<input type="checkbox"/> Contamination	<input type="checkbox"/> Maintenance
<input type="checkbox"/> Heat Treat	<input type="checkbox"/> Countersink	<input type="checkbox"/> Misabeled
<input type="checkbox"/> Inspection Strip in Tube	<input type="checkbox"/> Cut Too Short	<input type="checkbox"/> Misread
<input type="checkbox"/> Ripples in Bend	<input type="checkbox"/> Drill Holes	<input type="checkbox"/> Offset
<input type="checkbox"/> Torque Waves in Extrusion	<input type="checkbox"/> Drawing	<input type="checkbox"/> Out of Calibration
<input type="checkbox"/> Turning Sequence	<input type="checkbox"/> Finish	<input type="checkbox"/> Out of Sequence
<input type="checkbox"/> Wave/Twist in Tube	<input type="checkbox"/> Folio	<input type="checkbox"/> Outside Dimensions
		<input type="checkbox"/> Ovalized
		<input type="checkbox"/> Over/Under tolerance
		<input type="checkbox"/> Part Incorrect
		<input type="checkbox"/> Part Lost/Missing
		<input type="checkbox"/> Part Moved
		<input type="checkbox"/> Positioned Wrong
		<input type="checkbox"/> Power Loss/Surge
		<input type="checkbox"/> Pressure/Forced
		<input type="checkbox"/> Temperature/Cure
		<input type="checkbox"/> Weld
		<input type="checkbox"/> Wrong Stock Pulled
		<input type="checkbox"/> Other

Work Order ID 96251***96251***

Page 2

January-25-13 9:26:24 AM

Item ID: D4086-200 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: Placard, Max Load
Start Date: 1/16/13 Start Qty: 10.00 ***10*** Cust Item ID:
Required Date: 2/08/13 Req'd Qty: 10.00 ***10*** Customer:
Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start ***NR1***
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130	Identify as per dwg & Stock Location: _____	0.00							
130									
Packaging	Memo 093	0.00							
Packaging									
140	QC21- Final Inspection - Work Order Release	0.00							
140									
QC	Memo	0.00							
Quality Control									

13/01/21 (10)

13/1/31 (X)

1130131

NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update <input type="checkbox"/>	AGAINST DEPARTMENT/PROCESS <table style="width: 100%;"> <tr> <td>Skid-tube <input type="checkbox"/></td> <td>Crosstube <input type="checkbox"/></td> <td>Water Jet <input type="checkbox"/></td> <td>Engineering <input type="checkbox"/></td> </tr> <tr> <td>Machining <input type="checkbox"/></td> <td>Small Fab <input type="checkbox"/></td> <td>Prod. Eng. Coord. <input type="checkbox"/></td> <td>Quality <input type="checkbox"/></td> </tr> <tr> <td>Thermoforming <input type="checkbox"/></td> <td>Finishing <input type="checkbox"/></td> <td>Rec/Store/Packaging <input type="checkbox"/></td> <td>Other <input type="checkbox"/></td> </tr> <tr> <td>Large Fab <input type="checkbox"/></td> <td>Composite <input type="checkbox"/></td> <td>Supplier <input type="checkbox"/></td> <td></td> </tr> </table>	Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>	Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>	Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>	Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>	
Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>															
Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>															
Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>															
Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>																

Root Cause	Date	Step	Qty	Description of work order update or Non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector
Doc/Data									
Equip/Tooling									
Operator									
Material									
Setup									
Other									
Process									
Supplier									
Training									
Unapproved									

FAULT CATEGORY

Landing Gear	General	Other
<input type="checkbox"/> Bending	<input type="checkbox"/> Bend	<input type="checkbox"/> Grain
<input type="checkbox"/> Centre Not Concentric to O/S	<input type="checkbox"/> BOM/Route	<input type="checkbox"/> Hardware
<input type="checkbox"/> Cracks	<input type="checkbox"/> Broken/Damaged	<input type="checkbox"/> Inspection Incomplete
<input type="checkbox"/> Crushed/Crimped.	<input type="checkbox"/> Burrs	<input type="checkbox"/> Instructions Incomplete/Unclear
<input type="checkbox"/> Cuffs	<input type="checkbox"/> Contamination	<input type="checkbox"/> Maintenance
<input type="checkbox"/> Heat Treat	<input type="checkbox"/> Countersink	<input type="checkbox"/> Misabeled
<input type="checkbox"/> Inspection Strip in Tube	<input type="checkbox"/> Cut Too Short	<input type="checkbox"/> Misread
<input type="checkbox"/> Ripples in Bend	<input type="checkbox"/> Drill Holes	<input type="checkbox"/> Offset
<input type="checkbox"/> Torque Waves in Extrusion	<input type="checkbox"/> Drawing	<input type="checkbox"/> Out of Calibration
<input type="checkbox"/> Turning Sequence	<input type="checkbox"/> Finish	<input type="checkbox"/> Out of Sequence
<input type="checkbox"/> Wave/Twist in Tube	<input type="checkbox"/> Folio	<input type="checkbox"/> Outside Dimensions
		<input type="checkbox"/> Ovalized
		<input type="checkbox"/> Over/Under tolerance
		<input type="checkbox"/> Part Incorrect
		<input type="checkbox"/> Part Lost/Missing
		<input type="checkbox"/> Part Moved
		<input type="checkbox"/> Positioned Wrong
		<input type="checkbox"/> Power Loss/Surge
		<input type="checkbox"/> Pressure/Forced
		<input type="checkbox"/> Temperature/Cure
		<input type="checkbox"/> Weld
		<input type="checkbox"/> Wrong Stock Pulled
		<input type="checkbox"/> Other

Picklist Print

January-25-13 9:26:24 AM

Page 1

Work Order ID: 96251

Parent Item: D4086-200

Start Date: 1/16/13

Required Date: 2/08/13

Parent Item Name: Placard, Max Load

Start Qty: 10.00

Required Qty: 10.00

Comments: IPP REV:A NEW ISSUE 10-08-09 JLM VERIFIED BY:LL

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D4086-200P Placard, Max Load		Purchased	No			100	Each	0.0000	1	10			

SP 10x B-01-30


NCR: Yes / No

WORK ORDER NON-CONFORMANCE / UPDATE

DQA: _____ Date: _____

QA Closed: _____ Date: _____

Work Order: _____ Part No. _____ NCR No. _____				DISPOSITION <div style="display: flex; justify-content: space-around;"> <div> Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Work Order Update <input type="checkbox"/> </div> <div> Skid-tube <input type="checkbox"/> Machining <input type="checkbox"/> Thermoforming <input type="checkbox"/> Large Fab <input type="checkbox"/> </div> <div> Crosstube <input type="checkbox"/> Small Fab <input type="checkbox"/> Finishing <input type="checkbox"/> Composite <input type="checkbox"/> </div> <div> Water Jet <input type="checkbox"/> Prod. Eng. Coord. <input type="checkbox"/> Rec/Store/Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> </div> <div> Engineering <input type="checkbox"/> Quality <input type="checkbox"/> Other <input type="checkbox"/> </div> </div>		AGAINST DEPARTMENT/PROCESS						
Root Cause	Date	Step	Qty	Description of work order update or Non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector			
Doc/Data <input type="checkbox"/>												
Equip/Tooling <input type="checkbox"/>												
Operator <input type="checkbox"/>												
Material <input type="checkbox"/>												
Setup <input type="checkbox"/>												
Other <input type="checkbox"/>												
Process <input type="checkbox"/>												
Supplier <input type="checkbox"/>												
Training <input type="checkbox"/>												
Unapproved <input type="checkbox"/>												
FAULT CATEGORY												
Landing Gear <input type="checkbox"/> Bending <input type="checkbox"/> Centre Not Concentric to O/S <input type="checkbox"/> Cracks <input type="checkbox"/> Crushed/Crimped. <input type="checkbox"/> Cuffs <input type="checkbox"/> Heat Treat <input type="checkbox"/> Inspection Strip in Tube <input type="checkbox"/> Ripples in Bend <input type="checkbox"/> Torque Waves in Extrusion <input type="checkbox"/> Turning Sequence <input type="checkbox"/> Wave/Twist in Tube			General <input type="checkbox"/> Bend <input type="checkbox"/> BOM/Route <input type="checkbox"/> Broken/Damaged <input type="checkbox"/> Burrs <input type="checkbox"/> Contamination <input type="checkbox"/> Countersink <input type="checkbox"/> Cut Too Short <input type="checkbox"/> Drill Holes <input type="checkbox"/> Drawing <input type="checkbox"/> Finish <input type="checkbox"/> Folio			<input type="checkbox"/> Grain <input type="checkbox"/> Hardware <input type="checkbox"/> Inspection Incomplete <input type="checkbox"/> Instructions Incomplete/Unclear <input type="checkbox"/> Maintenance <input type="checkbox"/> Mislabeled <input type="checkbox"/> Misread <input type="checkbox"/> Offset <input type="checkbox"/> Out of Calibration <input type="checkbox"/> Out of Sequence <input type="checkbox"/> Outside Dimensions			<input type="checkbox"/> Ovalized <input type="checkbox"/> Over/Under tolerance <input type="checkbox"/> Part Incorrect <input type="checkbox"/> Part Lost/Missing <input type="checkbox"/> Part Moved <input type="checkbox"/> Positioned Wrong <input type="checkbox"/> Power Loss/Surge		<input type="checkbox"/> Pressure/Forced <input type="checkbox"/> Temperature/Cure <input type="checkbox"/> Weld <input type="checkbox"/> Wrong Stock Pulled <input type="checkbox"/> Other	

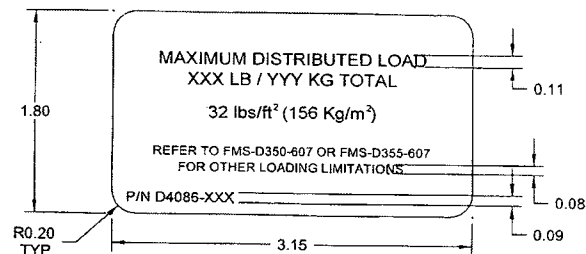

8 **D4086-XXX PLACARD, MAX LOAD**
(XXX = ALLOWABLE WEIGHT)

PART NUMBER	LOAD
D4086-200	200 lb / 91 kg
D4086-210	210 lb / 95 kg
D4086-215	215 lb / 98 kg
D4086-220	220 lb / 100 kg
D4086-232	232 lb / 105 kg
D4086-243	243 lb / 110 kg

NOTES:

- 1) MATERIAL: RED LETTERS WITH WHITE BACKGROUND AND ADHESIVE BACK.
MANUFACTURED FROM 3M, 7 MIL MASKING FILM #8522CP OR
AVERY IPM #2031
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: N/A
- 8) PART NUMBER = D4086-MAX DISTRIBUTED WEIGHT IN POUNDS (lbs) OF THE BASKET.
EXAMPLE: D4086-210 IS A BASKET WITH MAX DISTRIBUTED WEIGHT OF 210 POUNDS (lbs).

96251 MCT
13-01-25

RELEASED
10.08.12.04
BEN 10-866

B	ADDED -200/-215 PLACARDS. REASON: ADDITION OF D350-607-54X BASKET SERIES.	MB	10.08.04
A	NEW ISSUE	JPH	10.03.08
REV.	DESCRIPTION	BY	DATE
DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN		DRAWING NO.	REV. B
CHECKED		D4086	SHEET 1 OF 1
MFG. APPR.		TITLE	SCALE
APPROVED		PLACARD, MAX LOAD	NTS
DE APPR.		COPYRIGHT © 2010 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	
DATE	10.08.04		

Studio de Lettrage

210 Main Street W
Hawkesbury, Ontario K6A 2H6

INVOICE

Invoice No.: 19465
Date: 01/28/2013
Ship Date: 01/29/2013
Page: 1
Re: Order No. WO9216

Sold to:

Dart Aerospace Ltd
1270 Aberdeen
Hawkesbury, Ontario K6A 1K7

Ship to:

Dart Aerospace Ltd
Hawkesbury, Ontario

Business No.: 82500 7651-RT0001

Item No	Unit	Quantity	Description	Tax	Unit Price	Amount
✓ 12			D3499-5P	H	✓ 6.25	75.00 ✓
✓ 5			D2258-170P	H	15.00	75.00 ✓
✓ 10			D4085-3P	H	✓ 8.50	85.00 ✓
✓ 10			D4086-200P	H	✓ 7.50	75.00 ✓
✓ 6			D3678-1P	H	12.50	75.00 ✓
✓ 8			D3678-3P	H	12.50 ✓	75.00 ✓
			PO# 18950			
			H - HST 13%			
			HST			59.80
Studio de Lettrage HST: #825007651RT0001						
Shipped By: Tracking Number:						
Comment:					Total Amount	519.80
Sold By:						

GPB-01-30

****Certificate of Conformity****

Customer:

Studio Lettrage

Purchase Order #:

18950

Packing Slip #:

wo 9216

Part #:

Serial #:

Description: D3499-5P / D 2258-170

D4085-3P / D4086-200P

D3678-1P / D3678-3P

Quantity:

Certification:

We hereby certify that:

1. The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

3M

APPROVAL:

Sandy Collin

Signature:

Sandy Collin

Title:

Project coordinator

DATE:



Product & Instruction Bulletin 8522

Release 1, Effective September 2008

See Bulletin Change Summary and end of Bulletin

This Bulletin now includes Instruction Bulletin 4.23

Scotchcal™ Changeable Opaque Imaging Media 8522

Product Description

For Thermal Inkjet Printing

This durable, 7 mil, opaque, changeable film is optimized for use with selected thermal inkjet printers and inks. Ink dries quickly on the film. When overlaminated, it is warranted for medium term, outdoor weatherable graphics, and long term indoor graphics.

Recommended Types of Graphics and End Uses

When constructed and used as described in this Bulletin, these types of graphics and end uses may be warranted by the 3M™ MCS™ Warranty. Please read the entire Bulletin for details.

- First surface images (the image is on top of the film) for opaque posters and signs, including:
 - Graphics for vans, personal vehicles, trucks and buses
 - Novelty posters
 - Retail and point-of-purchase displays
 - Information graphics such as maps and directories
 - Entertainment promotions in museums, zoos, parks, theatres, sports venues
 - Education and presentation graphics
 - Legal and courtroom exhibits
- For flat or simple curved surfaces, with or without rivets, used in vertical ($\pm 10^\circ$) applications

Limitations of End Uses

3M specifically does not recommend or warrant the following uses, but please contact us to discuss your needs or recommend other products.

Unsuitable End Uses for This Product

- Not for electronically cut individual letters and numbers
- Fleet applications in areas that use salt for winter road maintenance
- Application to non-warranted substrates, including wallboard
- Applications subjected to gasoline vapors or spills
- Application to corrugated or highly irregular surfaces or sharply raised areas
- Graphics applied to stainless steel, including stainless steel vehicles
- On flat surfaces with rivets, tenting of 4 to 10 mm around rivets may be expected; rivets may be cut around to eliminate tenting.
- Graphics made for automotive Original Equipment Manufacturers (OEM); contact 3M Automotive Division at 1-800-328-1684 for alternatives.

About Water-Based Inkjet Technology

Standard inkjet technology is water based. Water-based chemistry is susceptible to the extremes of heat and humidity. This is a factor in most product constructions on the market. Read the Fabrication, Shelf Life and Storage sections in this Bulletin. Staying in the middle of these ranges always provides optimum performance.

Compatible Products

3M Graphic Materials

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

This Bulletin provides details about the base film and construction options and warranty. Additional specific information about compatible products can be found in the Product and Instruction Bulletins listed in **3M Related Literature** at the end of this bulletin.

3M Graphic Materials

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

Film

- 3M™ Scotchcal™ Opaque Imaging Media 8522

Overlamine

- 3M™ Scotchcal™ Luster Overlamine 8519
- 3M™ Scotchcal™ Matte Overlamine 8520

Printers and Inks

HP Designjet Printers

- 2500CP and 2000CP
2800CP and 3800CP
3500CP and 3000CP
- HP Designjet 5000 and 5500

- Z6100

HP Inks

- Designjet CP Ink System UV (pigment-based)
- Designjet CP Inkjet System (imaging ink)
- HP 91 Vivera Ink System

Epson Printers

- Stylus Pro 9500
- Stylus Pro 10000 printer
- Stylus Pro 10600 printer

Epson Inks

- Archival Inks

Characteristics

These are typical values for unprocessed product; processing may change the values. Contact your 3M representative for a custom specification.

Characteristic	Description
Media	7 mil, white, opaque graphic film
Liner	Low-slippage, lay flat paper
Adhesive	Changeable, pressure sensitive
Thickness	Media with adhesive: 7.5 to 8 mil (nominal)
Warranted application substrates	See next page.
Application surfaces	Flat or simple curved surfaces, with or without rivets, used in vertical ($\pm 10^\circ$) applications (no corrugations)
Application temperature range	28° to 110°F (-2° to 43°C) (air and surface)
Removable	For up to one year; see Warranty Information

Characteristic	Description
Warranted application substrates	<p>Some substrates may "out-gas", resulting in tiny bubbles throughout the surface of the graphic. For maximum performance, be sure the substrate you select is properly cleaned and prepared as recommended by the manufacturer. See Instruction Bulletin 5.1 for additional information.</p> <ul style="list-style-type: none"> • Alodine (anodized aluminum) • Automotive panels (automotive painted steel) • Fruehauf (painted aluminum) • FRP (fiberglass reinforced plywood) • Glass • Imron® (polyurethane-painted metal panel) • Acrylic • Sintra™ board <p>Note: Use on any other substrate is strictly on a graphics manufacturer and customer test and approve basis. Test for both adhesion and removal characteristics. The plasticizer in some banner materials may migrate. This may cause the edge of the graphic to peel or lift off of the banner. For optimum performance, follow the guidelines in the section, Creating A Laminated Overlap, on page 4.</p>

Warranty Information

The warranty given in the Product Bulletin that is current at the time you purchased the film is the one that 3M will honor. **The warranties in the following table(s), given in years, are for finished graphics exposed in a vertical exposure in the United States except the Desert Southwest.** See the warranty sections following this table for additional information.

3M™ MCST™ Warranty Durability for Finished Graphics

Construction (film and overlamine on warranted substrate)	HP Printers & Inks		Epson Printers & Inks		Removal
	Outdoor	Indoor	Outdoor	Indoor	
8522/8519	3 years	5 years	2 years	5 years	1 year without chemical strippers or tools
8522/8520					

Warranty and Limited Remedy


The following is made in lieu of all other express or implied warranties, including any implied warranty of **merchantability** or fitness for a particular purpose or implied warranty arising out of a course of dealing, custom or usage of trade: all 3M products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in this Product Bulletin. 3M will replace or refund the price of any 3M materials that do not meet this warranty within the specified time periods. These remedies are exclusive. **In no case shall 3M be liable for any direct, indirect, or consequential damages, including any labor or non-3M materials charges.**

See the Graphics Market Center Warranty Brochure, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.

Graphic Construction Options

Opaque Graphics

Opaque graphics made with imaging media 8522 require an overlaminate and an opaque substrate.

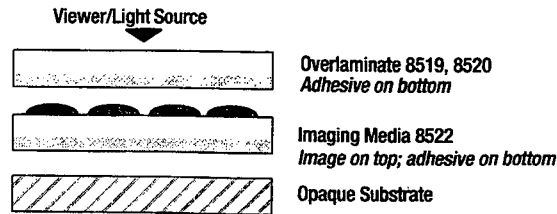

Fabrication

Shop Temperature

Acceptable: 60° to 95°F (15° to 35°C)
Optimum: 65° to 73°F (18° to 23°C)

Shop Humidity

Acceptable: 20% to 80%
Optimum: 45% to 60%

Condition the Media Before Use

These steps are especially important if you are operating outside the conditions recommended under Fabrication, above.

- Leave the media in its original packaging until you are ready to condition and use it.
- The day before you need it, remove the media from the box and remove the plastic.
- Condition the media for 24 hours in the same environment as the printer.

Printer Settings for Optimum Quality

Refer to your Hewlett Packard printer manual for detailed operating instructions.

The quality of a printed image depends on a combination of factors: correct media selection, printing software and raster imaging processor (RIP), shop conditions, etc.

The printers qualified to use this media have print mode options that are programmed specifically for these media. Current charts that show the various modes and printing dpi, and the quality results you can expect are available at www.hp.com under the website's support section. We recommend that you print the same image at all of these settings to determine acceptable print and productivity results.

The highest quality settings are usually desirable for backlit applications.

The correct media selection makes most other necessary adjustments to the printer.

- For the HP DesignJet CP 2000 or 3000 series printers, select the **Opaque Vinyl UV** setting.
- For the HP Designjet 5000 series printers, select the **3M Changeable UV** setting or the **HP Durable Gloss UV** or **HP Colorfast Vinyl** setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

- For the HP DesignJet CP 2000 or 3000 series printers, select the **Opaque Vinyl UV** setting.
- For the HP Designjet 5000 series printers, select the **3M Changeable UV** setting or the **HP Durable Gloss UV** or **HP Colorfast Vinyl** setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

Drying Guidelines

Usually, the media can be laminated within 10 minutes after printing. However, especially in high humidity conditions, we recommend waiting 15 to 30 minutes before laminating.


Use care when handling graphics that have not been laminated to avoid scratching and abrasion.

Graphics made with this media and ink combination typically may be wound directly on a take-up roll after printing.

Overlamine

Whether or not you want a warranted graphic, an overlamine is recommended to enhance durability, especially in outdoor applications.

FIGURE 1
Typical Laminator Thread-up

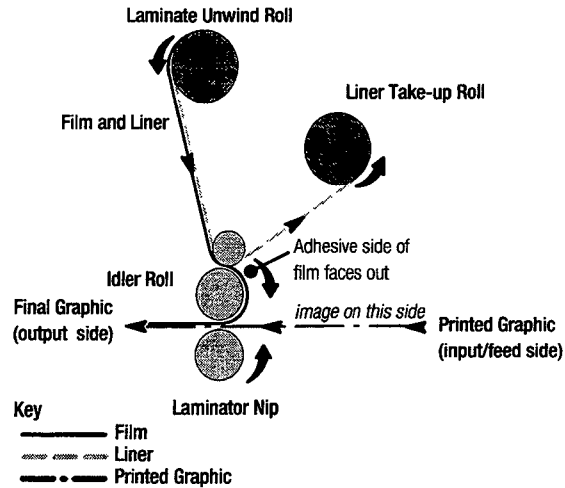


Creating a Laminated Overlap

Creating a laminated overlap helps ensure that the graphic does not peel or lift away from certain banner materials that may be subject to plasticizer migration. This method may also be used for flat, rigid or flexible sign applications.

1. Print the graphic as usual.
2. On all sides of the graphic, score *the film only* to the correct, final graphic dimension *without cutting through the liner*.

Weed away the excess film, leaving the bare liner exposed around the graphic. See FIGURE 2.

FIGURE 2
Trim and Weed Film Margin Only

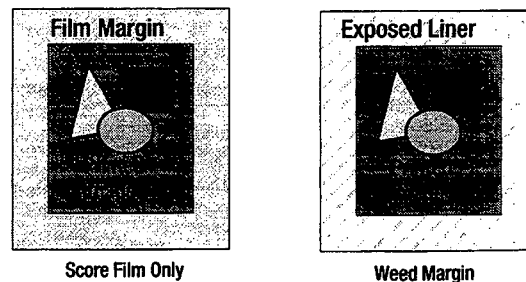

3. Laminate the graphic as usual (see page 5), making sure that at least one inch of the bare liner is covered by the laminate. See FIGURE 3.



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID PO18950

Purchase Order Date 1/25/2013

PO Print Date 1/25/2013

Page Number 1 of 2

Order From :

VC-STU001

STUDIO DE LETTRAGE 2001
210 MAIN WEST
HAWKESBURY, ON K6A 2H6
CA

Contact Name
Vendor Phone 613 632 5449
Vendor Fax 613 632 9491
Vendor Account Nbr

Buyer Brigitte Golden
Requisition Nbr
Tax Resale Nbr 10127-2607
Terms Net 30
Currency CAD
FOB Destination-Collect

Ship To : DART AEROSPACE LTD 1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

FAKED

Line Nbr	Reference Revision ID Vendor Part Number	Description/ Mfg ID	Req Date/ Taxable	Req Qty/ Unit of Measure	Ship Method	Unit Price	Extended Price
1	D3499-5P ✓	PLACARD	1/29/2013 Yes	12.00 Each	Yours ppd	\$6.2500	\$75.00
		Special Inst:	AS PER DWG:D3499 REV C B95961				
2	D2258-170P ✓	Placard - 170 lb	1/29/2013 Yes	5.00 Each	Yours ppd	\$15.0000	\$75.00 ✓
		Special Inst:	AS PER DWG: D2258 REV: F B96213				
3	D4085-3P ✓	Placard, Instructions	1/29/2013 Yes	10.00 Each	Yours ppd	\$8.5000	\$85.00 ✓
		Special Inst:	AS PER DWG: D4085 REV: C B96252				
4	D4086-200P ✓ SMP	Placard, Max Load	1/29/2013 Yes	10.00 Each	Yours ppd	\$7.5000	\$75.00 ✓

No substitution or deviation without
consent.
Certificate of Conformity or Material
Certification required - YES NO

Change Nbr: 2

Change Date: 1/25/2013

SP B-01-30